

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
47.20	Echeta Road, bears SE. and NW.
62.505	<p>Point for the N. 1/16 sec. cor. of secs. 27 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W N1/16 S 28   S 27 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p>
71.00	Wild Horse Creek (dry), course NNW.
83.34	<p>Point for the cor. of secs. 21, 22, 27 and 28, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 21   S 22 ----- S 28   S 27 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <hr/>
39.77	<p>From the cor. of secs. 22, 23, 26 and 27.</p> <p>S. 88° 56' W., bet. secs. 22 and 27.</p> <p>Over rolling to broken terrain.</p> <p>Point for the 1/4 sec. cor. of secs. 22 and 27, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 22 1/4 ——— S 27 2000</p> </div>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
79.54	The cor. of secs. 21, 22, 23 and 24.
	N. 0° 06' W., bet. secs. 21 and 22.
	Over rolling to broken terrain.
41.66	Point for the 1/4 sec. cor. of secs. 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  1/4  S 21   S 22  2000 </div>
	Set a steel fence post alongside the iron post.
44.50	Abandoned fence, bears ESE. and WNW.
83.32	Point for the cor. of secs. 15, 16, 21 and 22, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  S 16   S 15  <hr/> S 21   S 22  2000 </div>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 14, 15, 22 and 23.
	S. 88° 43' W., bet. secs. 15 and 22.
	Over rolling to broken terrain.
28.70	Wash, drains NW.
39.50	Point for the 1/4 sec. cor. of secs. 15 and 22, at proportionate distance; there is no remaining evidence of the original cor.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  S 15  1/4 ———  S 22  2000 </div>
	Set a steel fence post alongside the iron post.
47.00	Ridge, bears SE. and NW.
76.00	Trail road on ridge, bears SE. and NW.
79.00	The cor. of secs. 15, 16, 21 and 22.
	<hr/>
	N. 0° 02' E., bet. secs. 15 and 16.
	Over rolling to broken terrain.
41.66	Point for the 1/4 sec. cor. of secs. 15 and 16, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  1/4  S 16   S 15  2000 </div>
	Set a steel fence post alongside the iron post.
43.60	Spur, slopes WNW.
63.00	Twentymile Creek (dry), course WNW.
83.32	The cor. of secs. 9, 10, 15 and 16, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 6 ins. above the ground, with a mound of stone, 2½ ft. base, 1½ ft. high, W. of the cor. with a steel fence post alongside, at projection of fence from the E., as filed in the Campbell County Clerk's Office, with aluminum cap inscribed RUMPH SURVEYS GILLETTE, WYOMING and mkd.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="841 306 1019 459"> <p>T52N R75W S 9   S 10 S 16   S 15 LS 538 1987</p> </div> <div data-bbox="407 491 1442 555"> <p>This position is accepted as a careful and faithful determination of the original cor. position.</p> </div> <hr/> <div data-bbox="407 619 1052 651"> <p>From the cor. of secs. 10, 11, 14 and 15.</p> </div> <div data-bbox="407 683 976 715"> <p>S. 88° 28' W., bet. secs. 10 and 15.</p> </div> <div data-bbox="407 746 737 778"> <p>Over rolling terrain.</p> </div> <div data-bbox="282 810 927 842"> <p>28.60 Twentymile Creek (dry), course S.</p> </div> <div data-bbox="282 874 1442 1066"> <p>40.01 The 1/4 sec. cor. of secs. 10 and 15, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an iron post, 2½ ins. diam., firmly set, projecting 7 ins. above the ground, with a steel fence post alongside, at projection of fence from the W., as filed in the Campbell County Clerk's Office, with brass cap inscribed RUMPH SURVEYS and mkd.</p> </div> <div data-bbox="841 1102 1019 1289"> <p>T52N R75W S 10 1/4 — S 15 BER LS 538 1987</p> </div> <div data-bbox="407 1321 1442 1385"> <p>This position is accepted as a careful and faithful determination of the original cor. position.</p> </div> <hr/> <div data-bbox="407 1449 1052 1481"> <p>S. 88° 35' W., beginning new measurement.</p> </div> <div data-bbox="407 1513 737 1544"> <p>Over rolling terrain.</p> </div> <div data-bbox="282 1576 1097 1608"> <p>1.70 Fence, bears NE. and W.; thence along fence.</p> </div> <div data-bbox="282 1640 737 1672"> <p>20.70 Leave fence, bears N.</p> </div> <div data-bbox="282 1704 954 1736"> <p>40.01 The cor. of secs. 9, 10, 15 and 16.</p> </div>
--------	---

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	N. 0° 24' W., bet. secs. 9 and 10.
	Over rolling to broken terrain.
40.33	Point for the 1/4 sec. cor. of secs. 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  1/4  S 9   S 10  2000 </div>
	Set a steel fence post alongside the iron post.
41.10	Fence, bears ENE. and WSW.
80.66	Point for the cor. of secs. 3, 4, 9 and 10, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  S 4   S 3  <hr/> S 9   S 10  2000 </div>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 2, 3, 10 and 11.
	S. 88° 52' W., bet. secs. 3 and 10.
	Over rolling to broken terrain.
19.91	Point for the E. 1/16 sec. cor. of secs. 3 and 10.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  S 3  E 1/16 ———  S 10  2000 </div>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located S. <math>28\frac{1}{2}^{\circ}</math> W., 1.30 chs. dist., from cor. of fences extending S. and W.</p>
39.82	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 3 and 10, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W</p> <p>S 3</p> <p><math>\frac{1}{4}</math> —</p> <p>S 10</p> <p>2000</p> </div> <p>Set a steel fence post alongside the iron post.</p>
62.60	Wash, drains SSE.
79.64	The cor. of secs. 3, 4, 9 and 10.
	<hr/> <p>N. <math>1^{\circ} 13'</math> W., bet. secs. 3 and 4.</p> <p>Over rolling terrain.</p>
33.40	Trail road on ridge, bears NE. and SW.
34.50	Fence, bears SW. and N.; thence along fence.
40.34	<p>Point for the <math>\frac{1}{4}</math> sec. cor. of secs. 3 and 4, determined latitudinally by proportionate measurement and longitudinally by a fence extending N. and S.; there is no remaining evidence of the original monument.</p> <p>Set an iron post, 28 ins. long, <math>2\frac{1}{2}</math> ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W</p> <p><math>\frac{1}{4}</math></p> <p>S 4   S 3</p> <p>2000</p> </div> <hr/> <p>N. <math>1^{\circ} 26'</math> W., beginning new measurement.</p> <p>Over rolling terrain, along fence.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
8.30	Ridge, bears SE. and NW.
20.17	Point for the N. 1/16 sec. cor. of secs. 3 and 4.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  N1/16  S 4   S 3  2000 </div>
	Set a steel fence post alongside the iron post.
	Cor. is located 16 lks. E. of fence extending N. and S.
41.33	The closing cor. of secs. 3 and 4, at intersection with the
	Thirteenth Standard Parallel North, monumented with an aluminum post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.
	<p>From this point, the standard cor. of secs. 33 and 34, T. 53 N., R. 75 W., bears S. 89° 08' W., 15.29 chs. dist., monumented with an aluminum post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 3 only, T. 52 N., R. 75 W., is at midpoint on the N. bdy. of sec. 3.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T53N R75W  <hr/> 1/4 S 3  T52N R75W  2000 </div> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 34, T. 53 N., R. 75 W., bears S. 89° 19' W., 15.21 chs. dist., monumented with an iron post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> <hr/>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From the cor. of secs. 4, 5, 32 and 33, on the S. bdy. of the Tp. N. 1° 10' W., bet. secs. 32 and 33.</p> <p>Over mountainous terrain.</p>
22.15	<p>Point for the S. 1/16 sec. cor. of secs. 32 and 33, falls on steep W. slope of spur, slopes NNW.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, over a steel fence post, with brass cap mkd.</p> <p style="text-align: center;">T52N R75W S1/16 S 32   S 33 2000</p> <p>Set a steel fence post alongside the iron post.</p>
41.40	Snell Canyon, drains ENE.
44.30	<p>Point for the 1/4 sec. cor. of secs. 32 and 33, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R75W 1/4 S 32   S 33 2000</p> <p>Set a steel fence post alongside the iron post.</p>
80.30	Ridge, bears E. and W.
88.146	<p>The witness cor. to the cor. of secs. 28, 29, 32 and 33, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, in a collar of stone, with a steel fence post alongside, as filed in the Campbell County Clerk's Office, with aluminum cap inscribed RUMPH SURVEYS and mkd.</p> <p style="text-align: center;">T52N R75W S 29   S 28 — S 32   S 33 WC 30.0 FT SOUTH LS 538 1987</p>



Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Witness cor. is located 35 lks. E. of fence extending irregularly N. and S.</p> <p>88.60 True point for the cor. of secs. 28, 29, 32 and 33, determined at projected bearing through and record dist. from the witness cor. established by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, as filed in the Campbell County Clerk's Office, falls in chokecherry thicket in small draw, drains NW., where it is impracticable to establish a permanent monument. This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <hr/> <p>From the cor. of secs. 27, 28, 32 and 33.</p> <p>N. 86° 50' W., bet. secs. 28 and 33.</p> <p>Over rolling to broken terrain.</p> <p>36.60 Wash, drains SSW.</p> <p>39.90 The 1/4 sec. cor. of secs. 28 and 33, monumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with a steel reinforcement rod, 24 ins. long, 5/8 in. diam., firmly set, projecting 1 in. above the ground, with a steel fence post alongside, with aluminum cap inscribed RUMPH SURVEYS GILLETTE, WYOMING and mkd. T52N R75W 1/4 S28 S33 PLS 538 1997. This position is accepted as a careful and faithful reestablishment of the original cor. position.</p> <p>At the corner point</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W</p> <p>S 28</p> <p>1/4 —</p> <p>S 33</p> <p>2000</p> </div> <p>Deposit the steel reinforcement rod inside and retain the steel fence alongside the iron post.</p> <p>Cor. is located on spur, slopes S.</p> <hr/> <p>N. 86° 50' W., beginning new measurement.</p>
--------	--

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	Over mountainous terrain.
2.90	Wash, drains SE.
29.40	Ridge, bears S. and NW.
39.90	True point for the cor. of secs. 28, 29, 32 and 33.
	N. 1° 39' W., bet. secs. 28 and 29.
	Over rolling to broken terrain.
22.16	Point for the S. 1/16 sec. cor. of secs. 28 and 29.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.
	T52N R75W S1/16 S 29   S 28 2000
	Set a steel fence post alongside the iron post.
	Cor. is located 55 lks. E. of fence extending N. and S.
41.50	Ridge, bears SE. and NW.
44.32	The 1/4 sec. cor. of secs. 28 and 29, remonumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, in a collar of stone, at cor. of abandoned fences extending E. and S., with a steel fence post alongside, as filed in the Campbell County Clerk's Office, with aluminum cap inscribed RUMPH SURVEYS GILLETTE, WYOMING and mkd.
	T52N R75W 1/4 S 29   S 28 LS 538 1986
	This position is accepted as the best available evidence of the original cor. position.
	N. 3° 24' W., beginning new measurement.
	Over rolling to broken terrain.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
41.50	<p>The cor. of secs. 20, 21, 28 and 29, remonumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set flush with the surface of the ground, with a steel fence post alongside, with aluminum cap inscribed RUMPH SURVEYS GILLETTE, WYOMING and mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 20   S 21 ----- S 29   S 28 LS 538 1986</p> </div> <p>This position is accepted as the best available evidence of the original cor. position.</p>
	<p>From the cor. of secs. 21, 22, 27 and 28.</p> <p>N. 81° 19' W., bet. secs. 21 and 28.</p> <p>Over rolling terrain.</p>
20.12	<p>Point for the E. 1/16 sec. cor. of secs. 21 and 28.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 21 E1/16 ——— S 28 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p>
23.30	Wild Horse Creek (dry), course N.
30.90	Echeta Road, bears SSE. and NNW.
35.60	Burlington Northern Santa Fe Railway (double track), bears SSE. and NNW.
40.24	<p>The 1/4 sec. cor. of secs. 21 and 28, remonumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 4 ins. above the ground, in a collar of stone, with a steel fence post alongside, at cor. of fences extending ENE. and S., as filed in the Campbell County Clerk's Office, with aluminum cap inscribed RUMPH SURVEYS GILLETTE, WYOMING and mkd.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="824 306 1019 463" data-label="Text"> <p>T52N R75W S 21 1/4 COR — S 28 LS 538 1986</p> </div> <div data-bbox="407 493 1406 557" data-label="Text"> <p>This position is accepted as the best available evidence of the original cor. position.</p> </div> <hr data-bbox="678 583 1149 591"/> <div data-bbox="407 621 1052 655" data-label="Text"> <p>N. 88° 59' W., beginning new measurement.</p> </div> <div data-bbox="407 685 893 719" data-label="Text"> <p>Over rolling to broken terrain.</p> </div> <div data-bbox="282 749 1211 783" data-label="Text"> <p>20.86 Point for the W. 1/16 sec. cor. of secs. 21 and 28.</p> </div> <div data-bbox="407 812 1373 876" data-label="Text"> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="841 910 1006 1068" data-label="Text"> <p>T52N R75W S 21 W1/16 — S 28 2000</p> </div> <div data-bbox="407 1102 1146 1136" data-label="Text"> <p>Set a steel fence post alongside the iron post.</p> </div> <div data-bbox="407 1166 1146 1200" data-label="Text"> <p>Cor. is located on E. slope of spur, slopes SE.</p> </div> <div data-bbox="282 1229 971 1264" data-label="Text"> <p>41.72 The cor. of secs. 20, 21, 28 and 29.</p> </div> <hr data-bbox="407 1289 1432 1298"/> <div data-bbox="407 1323 954 1357" data-label="Text"> <p>N. 1° 37' E., bet. secs. 20 and 21.</p> </div> <div data-bbox="407 1387 734 1421" data-label="Text"> <p>Over rolling terrain.</p> </div> <div data-bbox="282 1451 1211 1485" data-label="Text"> <p>19.365 Point for the S. 1/16 sec. cor. of secs. 20 and 21.</p> </div> <div data-bbox="407 1515 1373 1578" data-label="Text"> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="847 1613 1000 1740" data-label="Text"> <p>T52N R75W S1/16 S 20   S 21 2000</p> </div> <div data-bbox="407 1770 1146 1804" data-label="Text"> <p>Set a steel fence post alongside the iron post.</p> </div>
--------	--

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
38.73	<p>Point for the 1/4 sec. cor. of secs. 20 and 21, determined longitudinally by proportionate measurement and latitudinally by a fence extending E. and W.; there is no remaining evidence of the original monument.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W 1/4 S 20   S 21 2000</p> <hr style="width: 20%; margin: 10px auto;"/> </div> <p>N. 1° 37' E., beginning new measurement.</p> <p>Over rolling terrain.</p>
8.30	Schoolhouse Draw, drains ENE.
37.30	Burlington Northern Santa Fe Railway (double track), bears SE. and NW., in curve.
39.46	<p>The cor. of secs. 16, 17, 20 and 21, remonumented by Bryce E. Rumph, Wyoming Registered Land Surveyor No. 538, with an aluminum post, 2½ ins. diam., firmly set, projecting 5 ins. above the ground, with a steel fence post alongside, as filed in the Campbell County Clerk's Office, with aluminum cap inscribed RUMPH SURVEYS GILLETTE, WYOMING and mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 17   S 16 <hr style="width: 20%; margin: 5px auto;"/>S 20   S 21 LS 538 1986</p> </div> <p>This position is in agreement with cor. tie as shown on right-of-way plat obtained from the Burlington Northern Santa Fe Railway Engineering Department, recovered by the U.S. Geological Survey in 1972, and is accepted as the best available evidence of the original cor. position.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>From the cor. of secs. 15, 16, 21 and 22.</p> <p>N. 88° 48' W., bet. secs. 16 and 21.</p> <p>Over rolling to broken terrain.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
19.785	<p>Point for the E. 1/16 sec. cor. of secs. 16 and 21.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S 16  E1/16 ———  S 21  2000 </div> <p>Set a steel fence post alongside the iron post.</p>
34.00	Wild Horse Creek (dry), course NNW.
39.57	<p>Point for the 1/4 sec. cor. of secs. 16 and 21, at proportionate distance, falls on slope of W. bank of Wild Horse Creek; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S 16  1/4 ———  S 21  2000 </div> <p>Set a steel fence post alongside the iron post.</p>
78.10	Echeta Road, bears SE. and NW.
79.14	The cor. of secs. 16, 17, 20 and 21.
	<hr/> <p>N. 0° 33' W., bet. secs. 16 and 17.</p>
	Over rolling terrain.
0.60	Echeta Road, bears SE. and NW.
20.095	<p>Point for the S. 1/16 sec. cor. of secs. 16 and 17.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S1/16  S 17   S 16  2000 </div>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
36.30	Wild Horse Creek (dry), course WNW.
40.19	Point for the 1/4 sec. cor. of secs. 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.  <div style="text-align: center;"> T52N R75W  1/4  S 17   S 16  2000 </div>
	Set a steel fence post alongside the iron post.
42.50	Twentymile Creek (dry), course WNW.
80.38	Point for the cor. of secs. 8, 9, 16 and 17, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.  <div style="text-align: center;"> T52N R75W  S 8   S 9  <hr/> S 17   S 16  2000 </div>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 9, 10, 15 and 16.  S. 89° 05' W., bet. secs. 9 and 16.  Over rolling to broken terrain.
31.20	Wash, drains SSW.
39.96	Point for the 1/4 sec. cor. of secs. 9 and 16, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T52N R75W S 9 1/4 ——— S 16 2000</p>
	Set a steel fence post alongside the iron post.
43.70	Spur, slopes SSW.
79.92	The cor. of secs. 8, 9, 16 and 17.
	<hr/> <p>N. 0° 22' W., bet. secs. 8 and 9.</p> <p>Over rolling to broken terrain.</p>
14.00	Spur, slopes W.
18.395	Point selected for the witness cor. to the S. 1/16 sec. cor. of secs. 8 and 9.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<p style="text-align: center;">WC T52N R75W S1/16 ↑ S 8   S 9 2000</p>
	Set a steel fence post alongside the iron post.
18.80	Wash, drains SW.
20.095	True point for the S. 1/16 sec. cor. of secs. 8 and 9, falls on steep, eroded W. slope of wash where it is impracticable to establish a permanent monument; there is no remaining evidence of the original cor.
39.30	Fence, bears irregularly NE. and SW.
40.19	Point for the 1/4 sec. cor. of secs. 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.



Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>T52N R75W 1/4 S 8   S 9 2000</p> <p>Set a steel fence post alongside the iron post.</p>
77.90	Wash, drains W.
80.38	<p>Point for the cor. of secs. 4, 5, 8 and 9, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p>T52N R75W S 5   S 4 — S 8   S 9 2000</p> <p>Set a steel fence post alongside the iron post.</p> <hr/> <p>From the cor. of secs. 3, 4, 9 and 10.</p> <p>S. 88° 53' W., bet. secs. 4 and 9.</p> <p>Over rolling to broken terrain.</p>
38.30	Ridge, bears SSE. and NNW.
39.92	<p>Point for the 1/4 sec. cor. of secs. 4 and 9, at proportionate distance, falls on steep SW. slope of ridge extending SSE. and NNW.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, over a steel fence post, with brass cap mkd.</p> <p>T52N R75W S 4 1/4 — S 9 2000</p> <p>Set a steel fence post alongside the iron post and raise a mound of stone, 3 ft. base, 2 ft. high, W. of the cor.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
40.90	Fence, bears irregularly N. and S.
79.84	The cor. of secs. 4, 5, 8 and 9.
	N. 1° 29' W., bet. secs. 4 and 5.
	Over rolling to broken terrain.
20.10	Point for the S. 1/16 sec. cor. of secs. 4 and 5, falls in small wash, drains N.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, over a steel fence post, in a collar of stone, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  S1/16  S 5   S 4  2000 </div>
	Set a steel fence post alongside the iron post.
22.80	Wash, drains WSW.
40.20	Point for the 1/4 sec. cor. of secs. 4 and 5, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  1/4  S 5   S 4  2000 </div>
	Set a steel fence post alongside the iron post.
58.30	Spring Draw, drains WSW.
81.57	Point for the closing cor. of secs. 4 and 5, at intersection with the Thirteenth Standard Parallel North, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	<div data-bbox="857 304 1003 521" data-label="Text"> <p>T53N R75W S 33</p> <hr/> <p>S 5   S 4 T52N R75W C C 2000</p> </div> <div data-bbox="402 555 1146 589" data-label="Text"> <p>Set a steel fence post alongside the iron post.</p> </div> <div data-bbox="402 619 1422 746" data-label="Text"> <p>From this point, the standard cor. of secs. 32 and 33, T. 53 N., R. 75 W., bears S. 88° 44' W., 13.58 chs. dist., monumented with an iron post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> </div> <hr/> <div data-bbox="402 810 1304 874" data-label="Text"> <p>The point for the 1/4 sec. cor. of sec. 4 only, T. 52 N., R. 75 W., is at midpoint on the N. bdy. of sec. 4.</p> </div> <div data-bbox="402 906 1370 968" data-label="Text"> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> </div> <div data-bbox="852 1004 1000 1155" data-label="Text"> <p>T53N R75W</p> <hr/> <p>1/4 S 4 T52N R75W 2000</p> </div> <div data-bbox="402 1191 1146 1225" data-label="Text"> <p>Set a steel fence post alongside the iron post.</p> </div> <div data-bbox="402 1255 1435 1383" data-label="Text"> <p>From this point, the standard 1/4 sec. cor. of sec. 33, T. 53 N., R. 75 W., bears S. 88° 44' W., 14.435 chs. dist., monumented with an iron post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> </div> <hr/> <div data-bbox="402 1447 1386 1570" data-label="Text"> <p>From the cor. of secs. 5, 6, 31 and 32, on the S. bdy. of the Tp., monumented with an iron post, 2½ ins. diam., as described in the 1986 field notes of the dependent resurvey, T. 51 N., R. 74 W.</p> </div> <div data-bbox="402 1604 954 1636" data-label="Text"> <p>N. 1° 10' W., bet. secs. 31 and 32.</p> </div> <div data-bbox="402 1670 797 1700" data-label="Text"> <p>Over mountainous terrain.</p> </div> <div data-bbox="280 1732 797 1766" data-label="Text"> <p>16.10 Snell Canyon, drains ESE.</p> </div> <div data-bbox="280 1796 656 1827" data-label="Text"> <p>40.00 Spur, slopes SE.</p> </div>
--------	--

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
43.56	<p>Point for the 1/4 sec. cor. of secs. 31 and 32, at proportionate distance, falls on steep NE. slope of small wash, drains ESE.; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, over a steel fence post, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  1/4  S 31   S 32  2000 </div> <p>Set a steel fence post alongside the iron post.</p>
81.00	Ridge, bears SSE. and NNW.
87.12	<p>Point for the cor. of secs. 29, 30, 31 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S 30   S 29  <hr style="width: 100px; margin: 0 auto;"/> S 31   S 32  2000 </div> <p>Set a steel fence post alongside the iron post.</p>
	<hr/> <p>From the true point for the cor. of secs. 28, 29, 32 and 33.</p> <p>S. 88° 19' W., bet. secs. 29 and 32.</p> <p>Over mountainous terrain.</p>
27.50	Ridge, bears N. and S.
40.23	<p>Point for the 1/4 sec. cor. of secs. 29 and 32, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S 29  1/4 ———  S 32  2000 </div>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
	Cor. is located on E. edge of wash, drains NNW.
48.00	Ridge, bears S. and NNW.
80.46	The cor. of secs. 29, 30, 31 and 32.
	<hr/>
	S. 86° 38' W., bet. secs. 30 and 31.
	Over mountainous terrain.
2.70	Trail road, on ridge, bears NNW.
13.70	Ridge, bears SE. and NW.
36.70	Spur, slopes SSW.
40.08	Point for the 1/4 sec. cor. of secs. 30 and 31, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.
	T52N R75W S 30 1/4 — S 31 2000
	Set a steel fence post alongside the iron post.
43.70	Wash, drains NW.
48.90	Spur, slopes NNW.
54.10	Schoolhouse Draw, drains N.
78.30	The cor. of secs. 25, 30, 31 and 36, on the W. bdy. of the Tp.
	<hr/>
	From the cor. of secs. 29, 30, 31 and 32.
	N. 1° 10' W., bet. secs. 29 and 30.
	Over mountainous terrain.
38.36	Point selected for the witness cor. to the 1/4 sec. cor. of secs. 29 and 30.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T52N R75W 1/4 ↑ S 30   S 29 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Witness cor. is located on narrow spur, slopes N.</p>
43.56	True point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance, falls on steep point of spur sloping N. into wash where it is impracticable to establish a permanent monument; there is no remaining evidence of the original cor.
44.30	Enter wash, drains N.
61.90	Leave wash, drains NE.
87.12	<p>Point for the cor. of secs. 19, 20, 29 and 30, determined longitudinally by proportionate measurement and latitudinally at projection of abandoned fence from the E.; there is no remaining evidence of the original monument.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 19   S 20 — — S 30   S 29 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <hr/> <p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 88° 22' W., bet. secs. 20 and 29.</p> <p>Over rolling to broken terrain.</p>
20.20	Wash, drains N.
31.50	Spur, slopes N.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>WC T52N R75W 1/4 ↑ S 30   S 29 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Witness cor. is located on narrow spur, slopes N.</p>
43.56	True point for the 1/4 sec. cor. of secs. 29 and 30, at proportionate distance, falls on steep point of spur sloping N. into wash where it is impracticable to establish a permanent monument; there is no remaining evidence of the original cor.
44.30	Enter wash, drains N.
61.90	Leave wash, drains NE.
87.12	<p>Point for the cor. of secs. 19, 20, 29 and 30, determined longitudinally by proportionate measurement and latitudinally at projection of abandoned fence from the E.; there is no remaining evidence of the original monument.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W S 19   S 20 — S 30   S 29 2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <hr/> <p>From the cor. of secs. 20, 21, 28 and 29.</p> <p>S. 88° 22' W., bet. secs. 20 and 29.</p> <p>Over rolling to broken terrain.</p>
20.20	Wash, drains N.
31.50	Spur, slopes N.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
39.23	<p>Point for the 1/4 sec. cor. of secs. 20 and 29, determined longitudinally by proportionate measurement and latitudinally by a fading abandoned fence extending E. and W.; there is no remaining evidence of the original monument.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S 20  1/4 ———  S 29  2000 </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located on E. edge of wash, drains N.</p> <hr style="width: 20%; margin: 10px auto;"/> <p>N. 89° 49' W., beginning new measurement.</p> <p>Over rolling to broken terrain, along fading abandoned fence.</p>
14.30	<p>Intersection of fences extending NNE. and SSW., with abandoned fence extending W.; thence along abandoned fence.</p>
19.61	<p>Point for the W. 1/16 sec. cor. of secs. 20 and 29.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> T52N R75W  S 20  W1/16 ———  S 29  2000 </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 8 lks. N. of abandoned fence extending E. and W.</p>
24.80	<p>Wash, drains NNE.</p>
39.22	<p>The cor. of secs. 19, 20, 29 and 30.</p> <hr style="width: 60%; margin: 10px auto;"/> <p>S. 83° 57' W., bet. secs. 19 and 30.</p> <p>Over rolling to broken terrain.</p>



Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
6.00	Spur, slopes N.
24.40	Schoolhouse Draw, drains NNE.
31.20	Spur, slopes SSE.
39.31	Point for the 1/4 sec. cor. of secs. 19 and 30, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.  <div style="text-align: center;"> T52N R75W  S 19  1/4 ———  S 30  2000 </div> Set a steel fence post alongside the iron post.  Cor. is located in wash, drains ESE.
77.23	The cor. of secs. 19, 20, 29 and 30, on the W. bdy. of the Tp. <hr/> From the cor. of secs. 19, 20, 29 and 30.  N. 0° 33' E., bet. secs. 19 and 20.  Over rolling to broken terrain.
8.00	Schoolhouse Draw, drains NE.
19.48	Point selected for the witness cor. to the S. 1/16 sec. cor. of secs. 19 and 20.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.  <div style="text-align: center;"> WC  T52N R75W  S 1/16  ↑  S 19   S 20  2000 </div> Set a steel fence post alongside the iron post.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
19.93	True point for the S. 1/16 sec. cor. of secs. 19 and 20, falls on steep, eroded W. slope of wash, drains SSE., where it is impracticable to establish a permanent monument.
38.80	Ridge, bears E. and W.
39.86	Point for the 1/4 sec. cor. of secs. 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.  <div style="text-align: center;"> T52N R75W  1/4  S 19   S 20  2000 </div> Set a steel fence post alongside the iron post.
79.72	Point for the cor. of secs. 17, 18, 19 and 20, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.  <div style="text-align: center;"> T52N R75W  S 18   S 17  <hr/> S 19   S 20  2000 </div> Set a steel fence post alongside the iron post.
	<hr/> From the cor. of secs. 16, 17, 20 and 21.  N. 89° 36' W., bet. secs. 17 and 20.  Over rolling to broken terrain.
2.90	Burlington Northern Santa Fe Railway (double track), bears SE. and NW., in curve.
39.92	Point for the 1/4 sec. cor. of secs. 17 and 20, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, in a collar of stone, with brass cap mkd.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p style="text-align: center;">T52N R75W S 17 1/4 ——— S 20 2000</p> <p>Set a steel fence post alongside the iron post.</p>
40.60	Spur, slopes NW.
79.84	The cor. of secs. 17, 18, 19 and 20.
	<hr/> <p>S. 86° 50' W., bet. secs. 18 and 19.</p> <p>Over rolling to broken terrain.</p>
20.04	<p>Point for the E. 1/16 sec. cor. of secs. 18 and 19.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T52N R75W S 18 E1/16 ——— S 19 2000</p> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located on W. edge of wash, drains NE.</p>
37.00	Ridge, bears N. and S.
40.08	<p>Point for the 1/4 sec. cor. of secs. 18 and 19, at proportionate distance, falls on sandstone boulder, 10x4x3 ft. above ground; there is no remaining evidence of the original cor.</p> <p>Set a brass tablet, 3¾ ins. diam., 3½ in. stem., in drill hole in sandstone boulder, with top mkd.</p> <p style="text-align: center;">T52N R75W S 18 1/4 ——— S 19 2000</p> <p>Set a steel fence post alongside the sandstone boulder.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
78.10	The cor. of secs. 13, 18, 19 and 24, on the W. bdy. of the Tp.
	<p>From the cor. of secs. 17, 18, 19 and 20.</p> <p>N. 0° 31' W., bet. secs. 17 and 18.</p> <p>Over rolling to broken terrain.</p>
25.80	Wash, drains NE.
39.86	<p>Point for the 1/4 sec. cor. of secs. 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="857 846 998 974" style="text-align: center;"> <p>T52N R75W</p> <p>1/4</p> <p>S 18   S 17</p> <p>2000</p> </div> <p>Set a steel fence post alongside the iron post.</p>
75.70	Wash, drains NE.
77.50	Small spur, slopes NE.
78.80	Wash, drains ENE.
79.72	<p>Point for the cor. of secs. 7, 8, 17 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1453 998 1602" style="text-align: center;"> <p>T52N R75W</p> <p>S 7   S 8</p> <hr/> <p>S 18   S 17</p> <p>2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located 35 lks. E. of fence extending irregularly N. and S.</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>From the cor. of secs. 8, 9, 16 and 17.</p> <p>S. 89° 56' W., bet. secs. 8 and 17.</p> <p>Over rolling terrain.</p>
39.90	<p>Point for the 1/4 sec. cor. of secs. 8 and 17, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W</p> <p>S 8</p> <p>1/4 ———</p> <p>S 17</p> <p>2000</p> </div>
	<p>Set a steel fence post alongside the iron post.</p>
50.50	<p>Wild Horse Creek (dry), course NW.</p>
71.10	<p>Echeta Road, bears SSE. and NNW.</p>
73.20	<p>Burlington Northern Santa Fe Railway, bears SSE. and NNW.</p>
77.20	<p>Wash, drains ENE.</p>
79.80	<p>The cor. of secs. 7, 8, 17 and 18.</p>
	<hr/> <p>S. 89° 39' W., bet. secs. 7 and 18.</p> <p>Over rolling to broken terrain.</p>
27.00	<p>Ridge, bears N. and S.</p>
40.04	<p>Point for the 1/4 sec. cor. of secs. 7 and 18, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T52N R75W</p> <p>S 7</p> <p>1/4 ———</p> <p>S 18</p> <p>2000</p> </div>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	Set a steel fence post alongside the iron post.
77.68	The cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp.
	From the cor. of secs. 7, 8, 17 and 18.
	N. 0° 39' W., bet. secs. 7 and 8.
	Over rolling terrain.
10.30	Burlington Northern Santa Fe Railway, bears SSE. and NNW.
13.60	Echeta Road, bears SSE. and NNW.
38.00	Wild Horse Creek (dry), course WNW.
39.86	Point for the 1/4 sec. cor. of secs. 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  1/4  S 7   S 8  2000 </div>
	Set a steel fence post alongside the iron post.
79.72	Point for the cor. of secs. 5, 6, 7 and 8, at proportionate distance; there is no remaining evidence of the original cor.
	Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.
	<div style="text-align: center;"> T52N R75W  S 6   S 5  <hr/> S 7   S 8  2000 </div>
	Set a steel fence post alongside the iron post.
	From the cor. of secs. 4, 5, 8 and 9.
	S. 89° 28' W., bet. secs. 5 and 8.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	Over rolling to broken terrain.
3.80	Wash, drains NNW.
38.00	Ridge, bears SSE. and NNW.
40.08	Point for the 1/4 sec. cor. of secs. 5 and 8, at proportionate distance; there is no remaining evidence of the original cor.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.  <div style="text-align: center;"> T52N R75W  S 5  1/4 ———  S 8  2000 </div>
	Set a steel fence post alongside the iron post.
47.50	Ridge, bears SE. and NW.
59.37	Point selected for the witness cor. to the W. 1/16 sec. cor. of secs. 5 and 8.  Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.  <div style="text-align: center;"> WC  T52N R75W  S 5  W1/16 &lt;——  S 8  2000 </div>
	Set a steel fence post alongside the iron post.
60.12	True point for the W. 1/16 sec. cor. of secs. 5 and 8, falls on steep E. slope of wash, drains NW., where it is impracticable to establish a permanent monument.
80.16	The cor. of secs. 5, 6, 7 and 8.  <hr/> N. 87° 31' W., bet. secs. 6 and 7.  Over gently rolling terrain.
3.90	Spring Draw, drains SSW.

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
18.00	Wild Horse Creek (dry), course NNW.
39.92	<p>Point for the 1/4 sec. cor. of secs. 6 and 7, at proportionate distance, falls in cultivated field; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <div data-bbox="857 591 1003 751" style="text-align: center;"> T52N R75W  S 6  1/4 —  S 7  2000 </div> <p>Set a steel fence post alongside the iron post.</p>
77.26	<p>The cor. of secs. 1, 6, 7 and 12, on the W. bdy. of the Tp.</p> <hr/> <p>From the cor. of secs. 5, 6, 7 and 8.</p> <p>N. 0° 20' W., bet. secs. 5 and 6.</p> <p>Over rolling to broken terrain.</p>
4.90	Spring Draw, drains SW.
39.86	<p>Point for the 1/4 sec. cor. of secs. 5 and 6, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, in a collar of stone, with brass cap mkd.</p> <div data-bbox="857 1389 1003 1517" style="text-align: center;"> T52N R75W  1/4  S 6   S 5  2000 </div> <p>Set a steel fence post alongside the iron post.</p> <p>Cor. is located on E. slope of ridge, bears SSE. and NNW.</p>
59.79	True point for the N. 1/16 sec. cor. of secs. 5 and 6, falls in bottom of narrow, steep-sided wash, drains SSE., where it is impracticable to establish a permanent monument.
60.29	Point selected for the witness cor. to the N. 1/16 sec. cor. of secs. 5 and 6.



Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	
	<p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, over a steel fence post, with brass cap mkd.</p> <p style="text-align: center;">WC T52N R75W N1/16 S 6   S 5 ↓ 2000</p> <p>Set a steel fence post alongside the iron post.</p>
70.80	Ridge, bears SE. and NW.
80.56	<p>Point for the closing cor. of secs. 5 and 6, at intersection with the Thirteenth Standard Parallel North, at proportionate distance; there is no remaining evidence of the original cor.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T53N R75W S 32 ----- S 6   S 5 T52N R75W C C 2000</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard cor. of secs. 31 and 32, T. 53 N., R. 75 W., bears S. 88° 44' W., 13.38 chs. dist., monumented with an iron post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 5 only, T. 52 N., R. 75 W., is at midpoint on the N. bdy. of sec. 5.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T53N R75W ----- 1/4 S 5 T52N R75W 2000</p>

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 32, T. 53 N., R. 75 W., bears S. 88° 44' W., 13.48 chs. dist., monumented with an iron post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> <hr/> <p>The point for the W. 1/16 sec. cor. of sec. 5 only, T. 52 N., R. 75 W., is at midpoint bet. the closing cor. of secs. 5 and 6 and the 1/4 sec. cor. of sec. 5 only, on the N. bdy. of sec. 5.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T53N R75W</p> <hr/> <p>W1/16 S 5</p> <p>T52N R75W</p> <p>2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 32, T. 53 N., R. 75 W., bears N. 88° 44' E., 6.15 chs. dist.</p> <hr/> <p>The point for the 1/4 sec. cor. of sec. 6 only, T. 52 N., R. 75 W., is at proportionate distance on the N. bdy. of sec. 6.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 24 ins. in the ground, with brass cap mkd.</p> <div style="text-align: center;"> <p>T53N R75W</p> <hr/> <p>1/4 S 6</p> <p>T52N R75W</p> <p>2000</p> </div> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 31, T. 53 N., R. 75 W., bears S. 88° 44' W., 13.385 chs. dist., monumented with an iron post, 2½ ins. diam., as described in the 1994-95 field notes of the dependent resurvey, T. 53 N., R. 75 W.</p> <hr/>
--------	--

Dependent Resurvey of the Subdivisional Lines,  
T. 52 N., R. 75 W., Sixth Principal Meridian, Wyoming

CHAINS	<p>The point for the W. 1/16 sec. cor. of sec. 6 only, T. 52 N., R. 75 W., is at proportionate distance bet. the closing cor. of Tps. 52 N., Rs. 75 and 76 W. and the 1/4 sec. cor. of sec. 6 only, on the N. bdy. of sec. 6.</p> <p>Set an iron post, 28 ins. long, 2½ ins. diam., 26 ins. in the ground, with brass cap mkd.</p> <p style="text-align: center;">T53N R75W</p> <hr style="width: 10%; margin: auto;"/> <p style="text-align: center;">W1/16 S 6 T52N R75W 2000</p> <p>Set a steel fence post alongside the iron post.</p> <p>From this point, the standard 1/4 sec. cor. of sec. 31, T. 53 N., R. 75 W., bears N. 88° 44' E., 6.195 chs. dist.</p> <hr/> <p style="text-align: center;">GENERAL DESCRIPTION</p> <p>The area embraced by this survey is situated in Campbell County, approximately 22 miles northwest of Gillette, Wyoming. The terrain varies from gently rolling to mountainous, with the elevation ranging from about 3,910 feet above sea level, where Wild Horse Creek crosses the west boundary of the township in section 6, to about 4,680 feet above sea level along the divide between Schoolhouse Draw and Snell Canyon. The soil varies from gravelly sandy loam to clay, with areas of scoria and exposed bedrock. Vegetation consists of sagebrush and native prairie grasses throughout, with stands of cottonwood along Wild Horse Creek and juniper in the mountainous southwest portion of the township.</p> <p>Primary drainage is provided by Wild Horse Creek, which courses northwesterly through the township. Spring Draw, Twentymile Creek and Rough Creek, all tributary to Wild Horse Creek, drain the northwest, northeast and southeast portions of the township, respectively. Schoolhouse Draw and Snell Canyon drain the southwest portion of the township into Wild Horse Creek. There is extensive oil and gas exploration and development in the area.</p> <p>Access is provided by Echeta Road, which parallels the Burlington Northern Santa Fe Railway along Wild Horse Creek. Improved oilfield roads and trail roads leading from Echeta Road extend throughout the township.</p>
--------	---

[illegible]

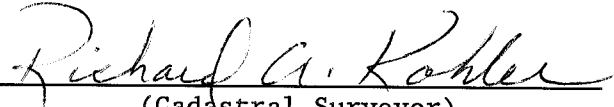
## CERTIFICATE OF SURVEY

251

I, Richard A. Kohler, Cadastral Surveyor, HEREBY CERTIFY upon honor that, in pursuance of special instructions bearing date of the 14th day of September, 1999, I have dependently resurveyed portions of the south and west boundaries, and the subdivisional lines, Township 52 North, Range 75 West, of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me and under my direction; and that said survey has been made in strict conformity with said special instructions, the Manual of Instructions for the Survey of the Public Lands of the United States, and in specific manner described in the foregoing field notes.

SEP 28 2001

(Date)

  
(Cadastral Surveyor)

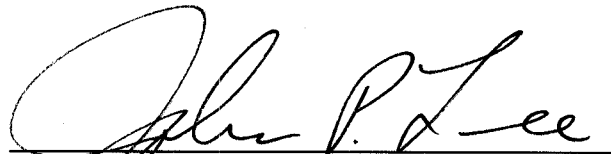
## CERTIFICATE OF APPROVAL

BUREAU OF LAND MANAGEMENT  
Cheyenne, Wyoming

The foregoing field notes of the dependent resurvey of portions of the south and west boundaries, and the subdivisional lines, Township 52 North, Range 75 West, Sixth Principal Meridian, Wyoming, executed by Richard A. Kohler, Cadastral Surveyor, having been critically examined and found correct, are hereby approved.

SEP 28 2001

(Date)

  
(Signature of Authorized Officer)